Flange Type Flexible Connector

Fig.SFHF

Flexible metal hose are used for:

Alignment and connecting of moving parts of equipment

absorption of pipe strain, vibration and ground sinking

Suitable for liquids, gases and steams under pressure

Features:

Flexible and durable stainless steel hose

Weather resistant construction

Significantly improved fatigue life

DN	Overall Length (mm)	Lateral Movement (mm)
15	300	-
20	300	30
25	300	30
32	300	30
40	300	30
50	300	30
65	300	30
80	300	30
100	300	25
125	300	20
150	300	20
200	300	10
250	300	5
300	300	5

Technical Specification:

Maximum Temperature 300℃

Maximum Working Pressure 16 Bar

Connection Flange to BS EN 1092 / ANSI / JIS

Loose (Floating) Flange on Both Sides

※Other material made is available

Part Name	Material
Lap Ring	Stainless Steel 304
Bellow / Tube	Stainless Steel 304
Braid	Stainless Steel 304
Loose Flange	Carbon Steel P235GH

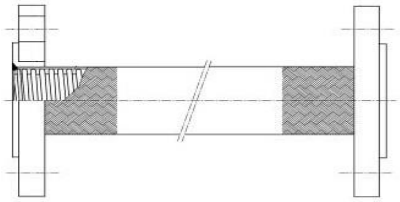

Size: 15mm - 100mm

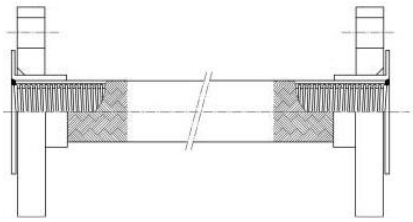

Size: 125mm - 300mm

Every effort has been made to ensure that the information contained in this publication is accurate at the time of publishing. HL assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

海聯五金有限公司
Hoi Luen Hardware Co., Ltd.
www.hoiluenhardware.com
Tel: (852) 2388 7282
sales@hoiluenhardware.com