


"HL" Flange

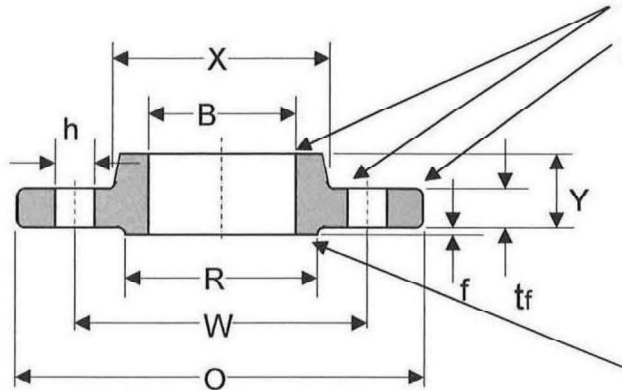

ASME B16.5 150LB											
DN	INCH	O	B	t _f	X	Y	W	h		R	f
15	1/2	90	22.2	9.6	30	14	60.3	15.88	4	34.9	2
20	3/4	100	27.7	11.2	38	14	69.9	15.88	4	42.9	2
25	1	110	34.5	12.7	49	16	79.4	15.88	4	50.8	2
32	1.1/4	115	43.2	14.3	59	19	88.9	15.88	4	63.5	2
40	1.1/2	125	49.5	15.9	65	21	98.4	15.88	4	73	2
50	2	150	61.9	17.5	78	24	120.7	19.05	4	92.1	2
65	2.1/2	180	74.6	20.7	90	27	139.7	19.05	4	104.8	2
80	3	190	90.7	22.3	108	29	152.4	19.05	4	127	2
90	3.1/2	215	103.4	22.3	122	30	177.8	19.05	8	139.7	2
100	4	230	116.1	22.3	135	32	190.5	19.05	8	157.2	2
125	5	255	143.8	22.3	164	35	215.9	22.23	8	185.7	2
150	6	280	170.7	23.9	192	38	241.3	22.23	8	215.9	2
200	8	345	221.5	27	246	43	298.5	22.23	8	269.9	2
250	10	405	276.2	28.6	305	48	362	25.4	12	323.8	2
300	12	485	327	30.2	365	54	431.8	25.4	12	381	2
350	14	535	359.2	33.4	400	56	476.3	28.58	12	412.8	2
400	16	595	410.5	35	457	62	539.8	28.58	16	469.9	2
450	18	635	461.8	38.1	505	67	577.9	31.75	16	533.4	2
500	20	700	513.1	41.3	559	71	635	31.75	20	584.2	2
600	24	815	616	46.1	663	81	749.3	34.93	20	692.2	2


海聯五金有限公司 Hoi Luen Hardware Company Limited

Tel: (852) 23887282 Fax: (852)27709032

Email: Sales@hoiluenhardware.com Website: www.hoiluenhardware.com

Address: ShopA, G/F., King Centre, No.23 Dundas Street, Kowloon, Hong Kong

"HL" Flange

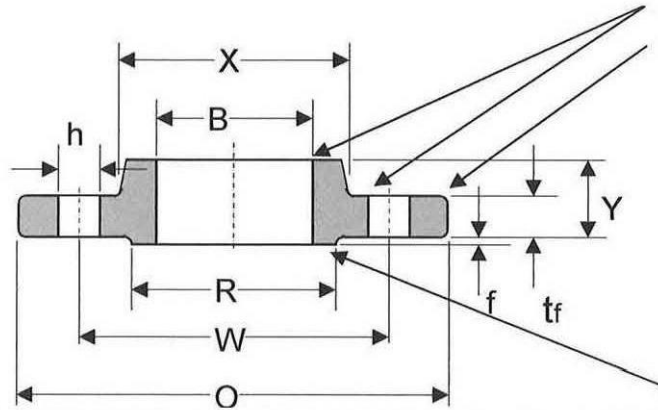

ASME B16.5 300LB											
DN	INCH	O	B	tf	X	Y	W	h		R	f
15	1/2	95	22.2	12.7	38	21	66.7	15.88	4	34.9	2
20	3/4	115	27.7	14.3	48	24	82.6	19.05	4	42.9	2
25	1	125	34.5	15.9	54	25	88.9	19.05	4	50.8	2
32	1.1/4	135	43.2	17.5	64	25	98.4	19.05	4	63.5	2
40	1.1/2	155	49.5	19.1	70	29	114.3	22.23	4	73	2
50	2	165	61.9	20.7	84	32	127	19.05	8	92.1	2
65	2.1/2	190	74.6	23.9	100	37	149.2	22.23	8	104.8	2
80	3	210	90.7	27	117	41	168.3	22.23	8	127	2
90	3.1/2	230	103.4	28.6	133	43	184.2	22.23	8	139.7	2
100	4	255	116.1	30.2	146	46	200	22.23	8	157.2	2
125	5	280	143.8	33.4	178	49	235	22.23	8	185.7	2
150	6	320	170.7	35	206	51	269.9	22.23	12	215.9	2
200	8	380	221.5	39.7	260	60	330.2	25.4	12	269.9	2
250	10	445	276.2	46.1	321	65	387.4	28.58	16	323.8	2
300	12	520	327	49.3	375	71	450.8	31.75	16	381	2
350	14	585	359.2	52.4	425	75	514.4	31.75	20	412.8	2
400	16	650	410.5	55.6	483	81	571.5	34.93	20	469.9	2
450	18	710	461.8	58.8	533	87	628.6	34.93	24	533.4	2
500	20	775	513.1	62	587	94	685.8	34.93	24	584.2	2
600	24	915	616	68.3	702	105	812.8	41.28	24	692.2	2